



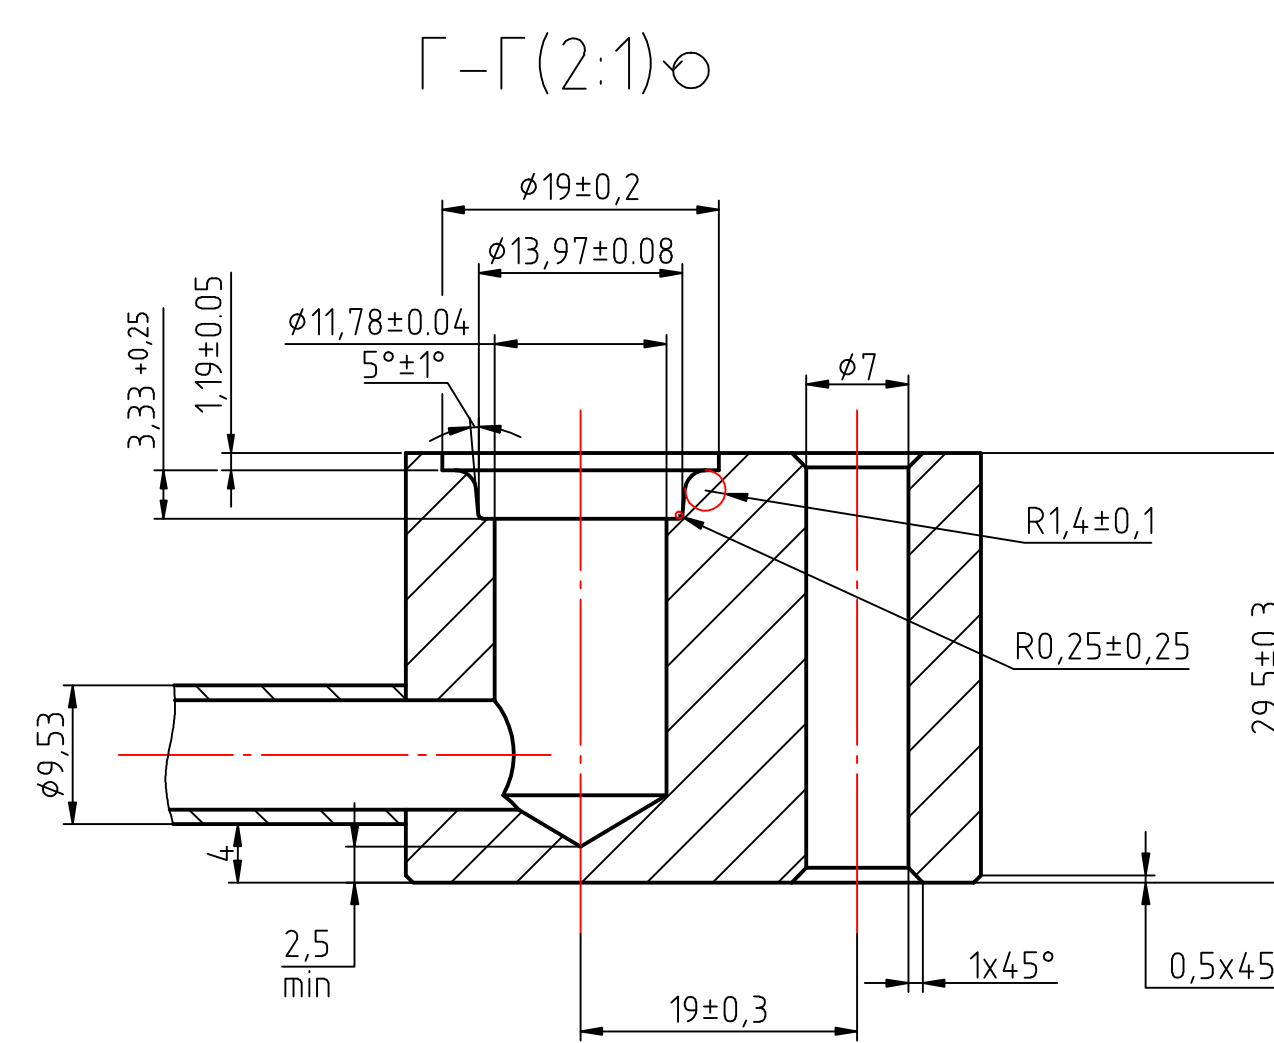

Точка	X	Y	Z	Длина, мм	Отрезок	Угол, °	Участок
a	1874,0	621,0	775,2				
b	1863,0	635,3	753,2				
c	1707,9	634,3	743,1	155,47	b-c		
d	1668,0	634,3	740,6	39,98	c-d	122°48'	c-d-e
e	1641,7	637,5	693,7	53,87	d-e	157°33'	d-e-f
f	1530,8	637,2	605,4	141,76	e-f	151°26'	e-f-g
g	1442,7	641,7	589,7	89,6	f-g	111°12'	f-g-h
h	1398,0	626,0	589,7	47,38	g-h	109°21'	g-h-j
j	1398,0	584,0	589,7	42	h-j	135°23'	h-j-k
k	1364,6	546,9	574,7	52,12	j-k	135°23'	j-k-l
l	1364,6	473,9	574,7	73	k-l	118°40'	k-l-m
m	1334,9	455,4	558,5	38,56	l-m	157°21'	l-m-n
n	1282,5	449,1	503,0	59,98	m-n	152°03'	m-n-o
o	1187,5	449,1	528,0	95,02	n-o	75°35'	n-o-p
p	1208,3	374,5	503,0	81,38	o-p	130°44'	o-p-q
q	1177,8	334,3	475,3	57,56	p-q	111°09'	p-q-r
r	1140,7	345,3	471,0	38,93	q-r	97°19'	q-r-f
s	1126,0	332,1	429,3				
t	1139,9	345,1	429,0	42,01	r-t		

Длина трубки	Точность
до 50 мм	±2
от 50 до 100 мм	±3
от 100 до 250 мм	±4
от 250 до 500 мм	±5
свыше 500 мм	±6
Точность углов	±2°

Наименование	Спецификация материала
Трубка	EDS-M-2104 (A3003TD)
Порт	EDS-M-2105 (A6061FD) EDS-M-2101 (ADC12)

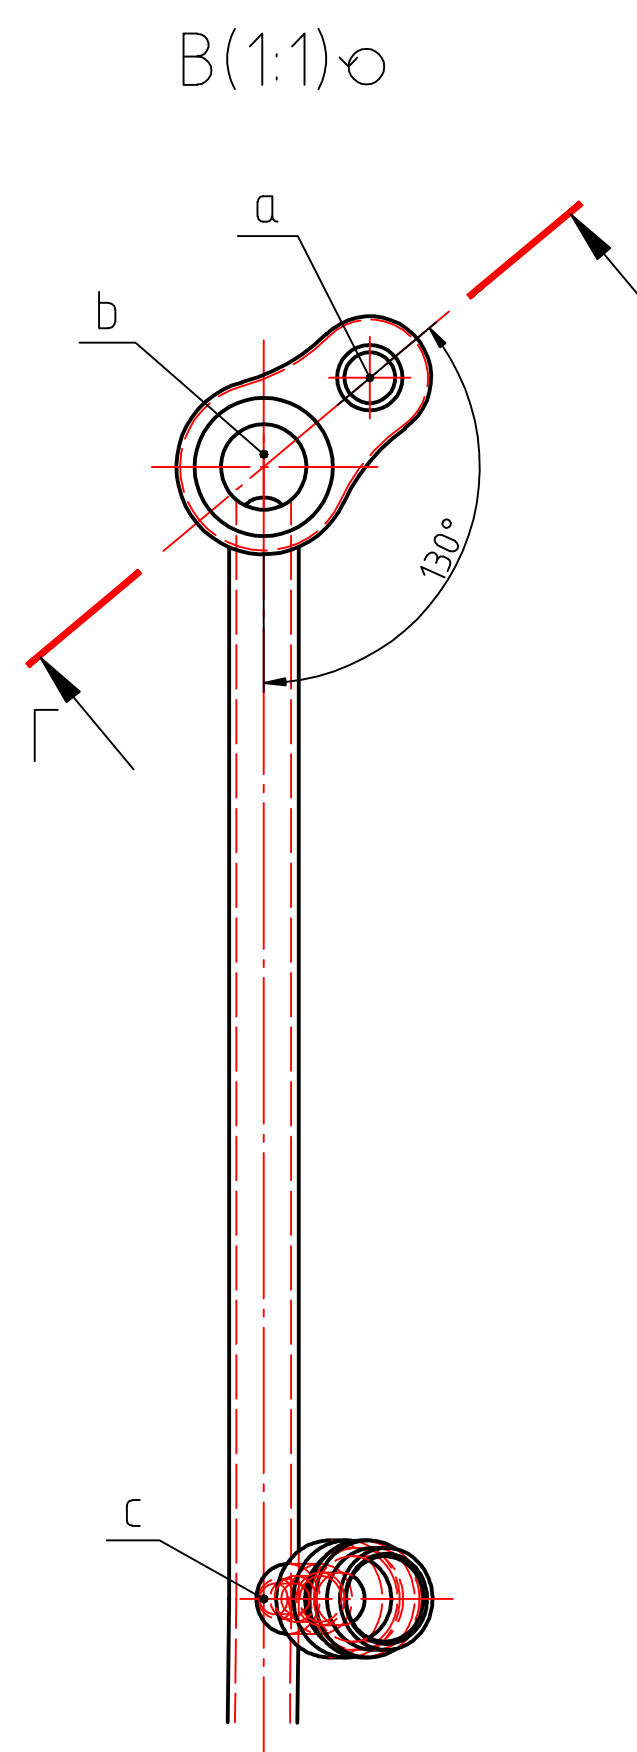

A technical diagram of a drill bit with a 65-degree point angle. The bit is shown in cross-section, with a red dashed line indicating the axis of rotation. A curved arrow indicates the 65-degree angle between the two cutting edges. The bit is shown drilling into a rectangular block.

						75105022				
Изн.	Лист	№ докум.	Подп.	Дата	Трубка конденсатора			Лист	Масса	Масштаб
Разработ.		Коженков Г.Ю.								1:2.5
Пров.		Толсторов Е.В.								
Т.контр.								Лист	Листов	1
Н.контр.								000 "ТТК"		
Чит.		Шмидль К.Ю.								